



TOP VIEW

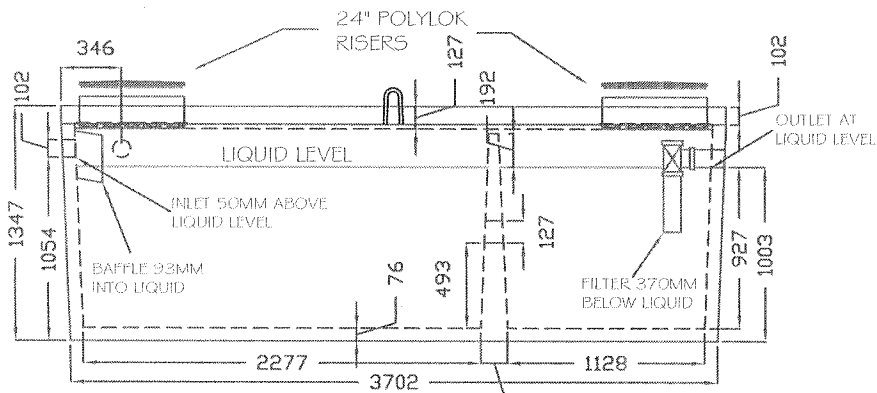

SIDE VIEW

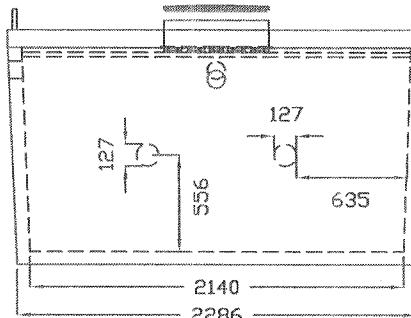

END VIEW

DIMENSIONS:

ALL DIMENSIONS IN MILLIMETERS
 +/- 10mm TOLERANC ON DIMENSIONS

CONCRETE:

STANDARD
 STANDARD ACC+(ACCELERATED STRIPPING)
 10 MPa STRIPPING STRENGTH
 35 MPa @ 28 DAYS
 C-1 EXPOSURE CLASS
 SULPHATE RESISTANT

REINFORCEMENT:

ALL REINF. HAS MIN. 25mm OF COVER

TANK:

WWF 6"x6" 8/6 (BOTTOM AND 36" OF SIDES)
 1 - 10M RING (TOP)
 4 - 10M VERTICALS (SIDES)

LID:

1 - 10M RING
 4 - 10M BARS LONG WAY
 2 - 10M BARS SHORT WAY

WEIGHT:

APPROX. 16408 LBS/7458 KG

NOTES:

USE 3/8" x 8 1/2" PURPLE LIFTERS ON LID
 DIVIDER WALL IS MONOLITHIC CAST
 JOINT SEALANT IS MASTIC SEALANT (CONSEAL CS-102)
 TANK ASSEMBLED IN FACTORY
 1.5M MAXIMUM BURIAL
 INLET AND OUTLET ARE 4" POLYLOK PIPE SEALS
 LIDS AND RISERS ARE 24" DIAMETER POLYLOK



58 COOPER ROAD
 ROSSLYN, ONT.
 Phone: (807) 939-2655
 Fax: (807) 939-1788

PRODUCT

1500 GAL/ 6820 L SEPTIC TANK

JOB/PRODUCT CODE:

1500STPR

CONTRACTOR:

SCALE:

N.T.S

DATE	INI.	DESCRIPTION
11/27/13	MH	ORIGINAL DRAWING