



TOP VIEW

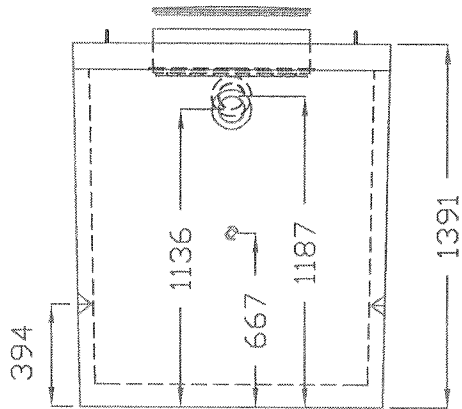

SIDE VIEW (1)

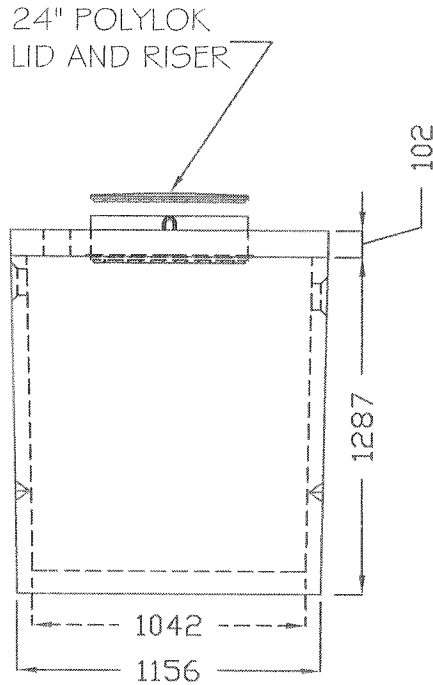

SIDE VIEW (2)

DIMENSIONS:

ALL DIMENSIONS IN MILLIMETERS.  
+/- 10mm TOLERANCES ON ALL DIMENSIONS

CONCRETE:

STANDARD  
STANDARD ACC(ACCELERATED STRIPPING)  
35 MPa @ 28 DAYS  
C-1 EXPOSURE CLASS  
5-7% AIR ENTRAINMENT  
0.97 CUBIC YARDS

REINFORCEMENT:

ALL REINF. HAS MIN. 25mm OF COVER

WEIGHT:

ASSEMBLED WEIGHT APPROX. ---- LBS/---- KG

NOTES:

JOINT SEALANT IS MASTIC SEALANT (CONSEAL CS-102)  
1.5M MAXIMUM BURIAL  
INLET AND OUTLET ARE 4" POLYLOK PIPE SEALS  
LID AND RISER IS A 24" DIAMETER POLYLOK



58 COOPER ROAD  
ROSSLYN, ONT.  
Phone: (807) 939-2655  
Fax: (807) 939-1788

PRODUCT

250 GAL / 1125L PUMP TANK

JOB/PRODUCT CODE:

250PT

CONTRACTOR:

SCALE:

N.T.S

DATE	INI.	DESCRIPTION
NOV 2013	MH	ORIGINAL DRAWING