


TOP VIEW

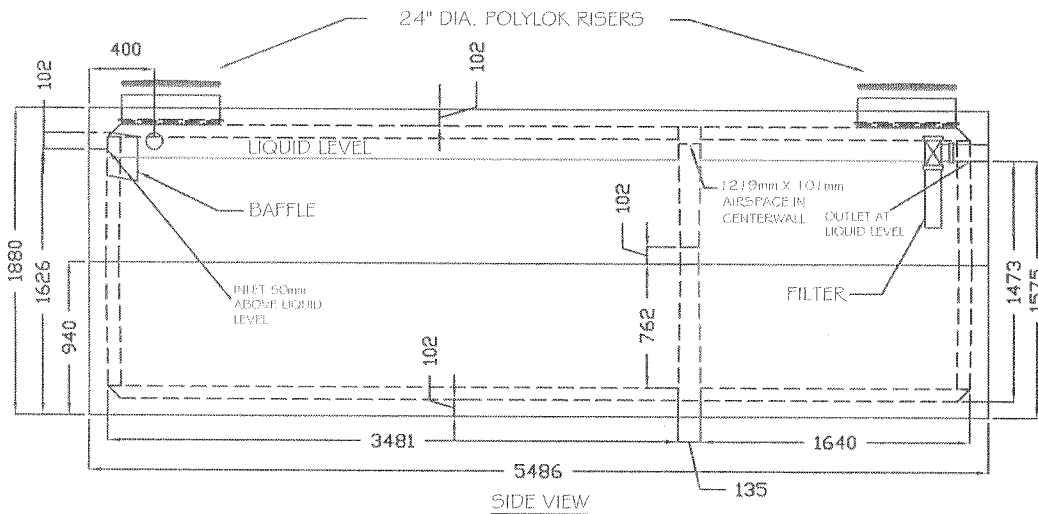

SIDE VIEW

DIMENSIONS:

ALL DIMENSIONS IN MILLIMETERS.
 +/- 10mm TOLERANCES ON ALL DIMENSIONS

CONCRETE:

STANDARD
 STANDARD ACC+ (ACCELERATED STRIPPING)
 10 MPA STRIPPING STRENGTH
 35 MPa @ 28 DAYS
 C-1 EXPOSURE CLASS
 SULPHATE RESISTANT
 4.4 CUBIC YARDS(TOP HALF)
 4.4 CUBIC YARDS(BOTTOM HALF)

REINFORCEMENT:


ALL REINF. HAS MIN. 25mm OF COVER
 10M @ 300mm O/C E/W
 CORNER BARS AROUND RISERS

WEIGHT:

EACH SECTION APPROX. 16546 LBS/7521 KG
 ASSEMBLED WEIGHT APPROX. 33092 LBS/15042 KG

NOTES:

DIVIDER WALL IS MONOLITHIC CAST
 JOINT SEALANT IS MASTIC SEALANT (CONSEAL CS-102)
 TANK ASSEMBLED ON SITE
 SEE INSTRUCTIONS FOR ASSEMBLY PROCEDURES
 1.5M MAXIMUM BURIAL
 INLET AND OUTLET ARE 4" POLYLOK PIPE SEALS
 LIDS AND RISERS ARE 24" DIAMETER POLYLOK

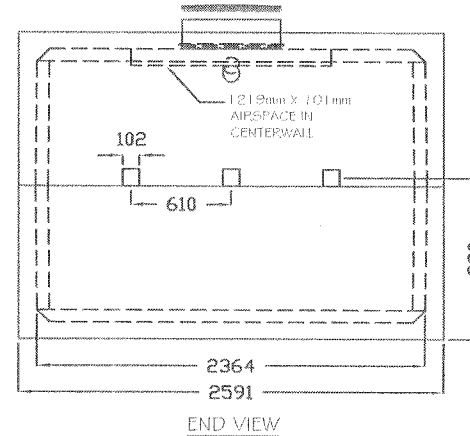

END VIEW



58 COOPER ROAD
 ROSSLYN, ONT.
 Phone: (807) 939-2655
 Fax: (807) 939-1788

PRODUCT

4000 GAL/ 18200 L SEPTIC TANK

JOB/PRODUCT CODE:

4000STPR

CONTRACTOR:

SCALE:

N.T.S

DATE	INI.	DESCRIPTION
SEPT 2013	DSM	ORIGINAL DRAWING