

**DIMENSIONS**

ALL DIMENSIONS IN MILLIMETERS.  
+/- 10mm TOLERANCE ON ALL DIMENSIONS

**CONCRETE:**

STANDARD  
STANDARD ACC+(ACCELERATED STRIPPING)  
10 MPa STRIPPING STRENGTH  
35 MPa @ 28 DAYS  
C-1 EXPOSURE CLASS  
SULPHATE RESISTANT  
3.9 CUBIC YARDS(BOTTOM HALF)  
3.9 CUBIC YARDS(TOP HALF)

**REINFORCEMENT:**


ALL REINF. HAS MIN. 25mm OF COVER  
10M @ 300mm O/C E/W  
CORNER BARS AROUND RISERS

**WEIGHT:**


EACH SECTION APPROX. 18554 LBS/8434 KG  
ASSEMBLED WEIGHT APPROX. 37107 LBS/16867 KG

**NOTES:**


DIVIDER WALL IS MONOLITHIC CAST  
JOINT SEALANT IS MASTIC SEALANT (CONSEAL CS-102)  
TANK ASSEMBLED ON SITE  
SEE INSTRUCTIONS FOR ASSEMBLY PROCEDURES  
1.5M MAXIMUM BURIAL  
INLET AND OUTLET ARE 4" POLYLOK PIPE SEALS  
LIDS AND RISERS ARE 24" DIAMETER POLYLOK

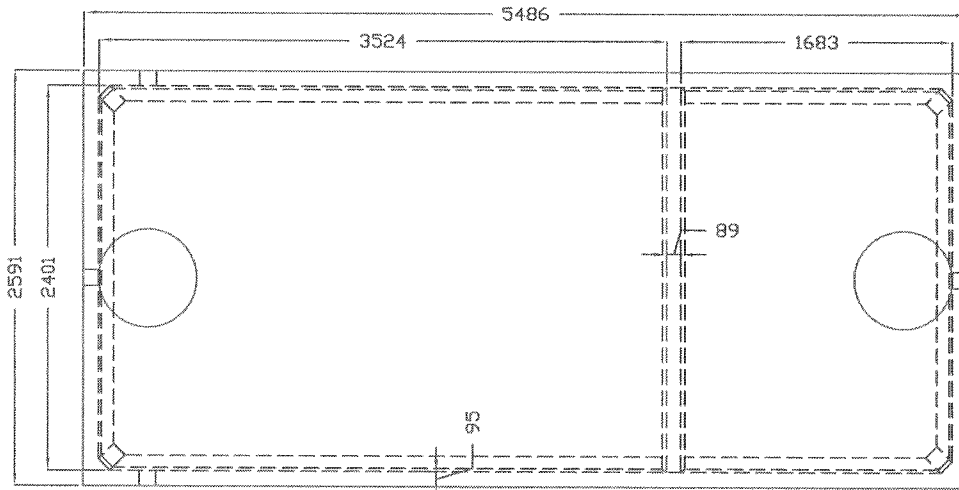

TOP VIEW

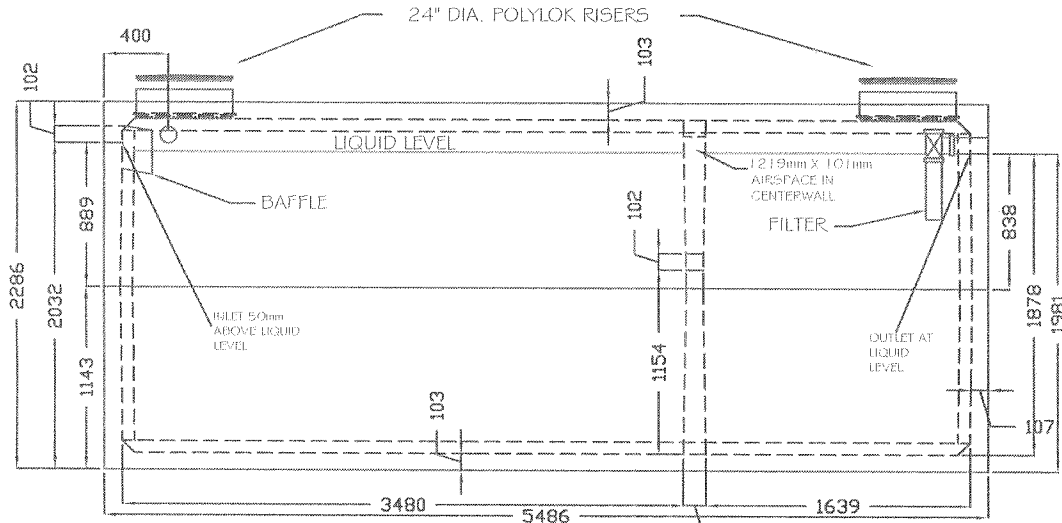

SIDE VIEW

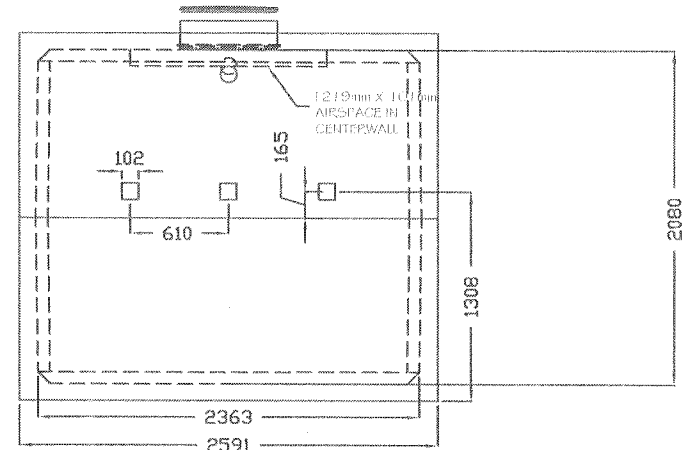

END VIEW



58 COOPER ROAD  
ROSSLYN, ONT.  
Phone: (807) 939-2655  
Fax: (807) 939-1788

PRODUCT

5000 GAL/ 22750 L SEPTIC TANK

JOB/PRODUCT CODE:

5000STPR

CONTRACTOR:

SCALE:

N.T.S

DATE	INI.	DESCRIPTION
SEPT 2013	DM	ORIGINAL DRAWING