



TOP VIEW

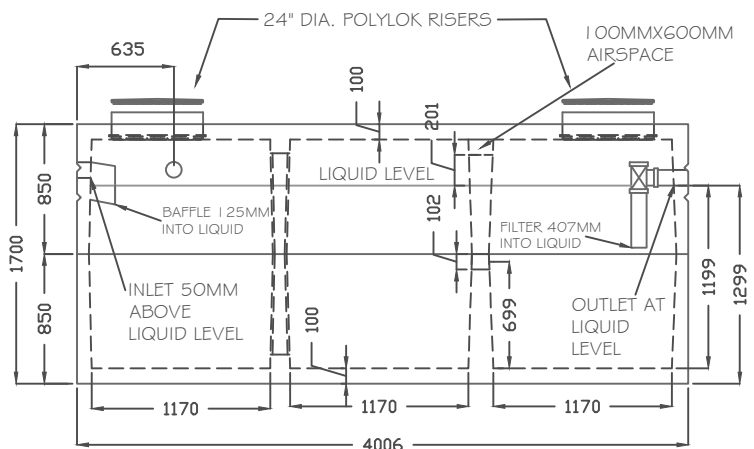

SIDE VIEW

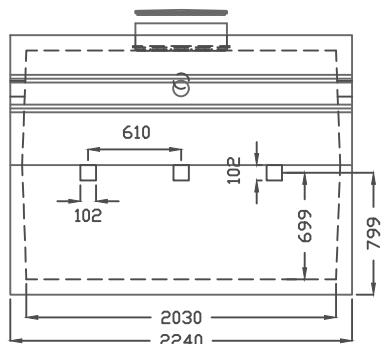

END VIEW

DIMENSIONS:

ALL DIMENSIONS IN MILLIMETERS.
+/- 10mm TOLERANCE ON ALL DIMENSIONS

CONCRETE:

STANDARD
STANDARD ACC+(ACCELERATED STRIPPING)
10 MPa STRIPPING STRENGTH
35 MPa @ 28 DAYS
C-1 EXPOSURE CLASS
SULPHATE RESISTANT
2.2 CUBIC YARDS PER HALF

REINFORCEMENT:

ALL REINF. HAS MIN. 25mm OF COVER
10M @ 300mm O/C E/W
CORNER BARS AROUND RISERS

WEIGHT:

EACH SECTION APPROX. 8600 LBS/3909 KG
ASSEMBLED WEIGHT APPROX. 17200 LBS/7818 KG

NOTES:

DIVIDER WALL IS MONOLITHIC CAST
JOINT SEALANT IS MASTIC SEALANT (CONSEAL CS-102)
TANK ASSEMBLED ON SITE
SEE INSTRUCTIONS FOR ASSEMBLY PROCEDURES
1.5M MAXIMUM BURIAL
INLET AND OUTLET ARE 4" POLYLOK PIPE SEALS
LIDS AND RISERS ARE 24" DIAMETER POLYLOK



58 COOPER ROAD
ROSSLYN, ONT.
Phone: (807) 939-2655
Fax: (807) 939-1788

PRODUCT

2000 GAL/ 9000 L SEPTIC TANK

CONTRACTOR:

.

SCALE:

N.T.S

JOB/PRODUCT CODE:

2000STPR

DATE	INI.	DESCRIPTION
OCT 2012	MH	ORIGINAL DRAWING